

ES600 series

Annunciators

The ES600 series annunciators provide an efficient means of displaying the condition of security devices throughout a monitored facility. They serve to provide visual and audible indication of alarms as they occur, giving security personnel the ability to monitor a large complex from a single location.

Designed Security, Inc. Multi-Zone Annunciators utilize a modular concept to provide state-of-the-art alarm monitoring in a compact and economical package. Standard and optional control electronics are organized into four zone modules which can be grouped to provide a wide range of monitoring capabilities.



ES600 Series



FEATURES & BENEFITS

- Easy installation
- Solid state design
- Available in 4, 8 and 12 zone configuration
- Monitors normally closed dry contacts
- 12 volt DC operation
- Global alarm output (N/O relay)
- Optional individual zone shunt
- Optional individual zone relay output
- Optional end of line supervision
- Painted off-white aluminum (custom silk screening is available - please contact factory)
- Fits in 1, 2, 3 and 4 gang boxes


DS!
DESIGNED SECURITY, INC.
A Detex Company

Designed Security, Inc.
302 Detex Drive
New Braunfels, TX 78130
800-272-3555
512-321-4426

www.dsigo.com
dsi@dsigo.com

Models

ES610	4 Zone Annunciator
ES620	8 Zone Annunciator
ES630	12 Zone Annunciator

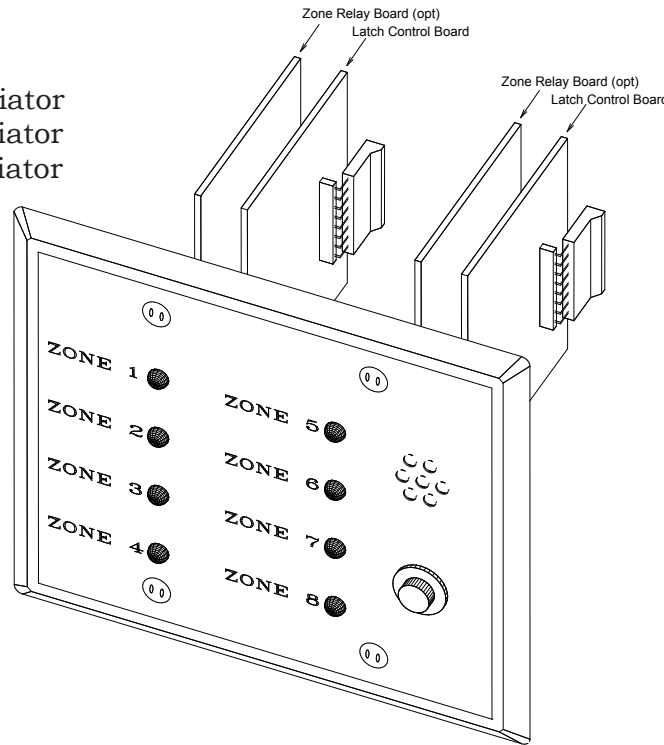

ELECTRICAL SPECIFICATIONS

Power:	12 VDC
Local Control:	Alarm Acknowledge "ACK"
Zone Input:	N/C Dry Contacts
Alarm Output:	Global N/O Relay 0.5 A @ 30 VDC

MECHANICAL SPECIFICATIONS

Mounting/Size:

1 gang	3.0"w x 4.6"h x 2.5"d ES610, ES611
2 gang	4.6"w x 4.6"h x 2.5"d ES612, ES613, ES614, ES615, ES620, ES621
3 gang	6.4"w x 4.6"h x 2.5"d ES622, ES623, ES624, ES625, ES630, ES631
4 gang	8.2"w x 4.6"h x 2.5"d ES632, ES633, ES634, ES635

Trim Plate Finish: Painted off white aluminum panel with gray silk screened text. **

** Custom silk screening is available.
Please contact factory.

PRODUCT DESCRIPTION

- Latch Control (standard)**
 Alarm condition causes the zone LED to flash red, the audible to sound, and activates a global alarm contact. The annunciator remains in this mode until the alarm is acknowledged by pressing the "ACK" button. Acknowledging the alarm silences the audible, resets the global contact, and sets the zone LED to a steady "on" until the point is reset. Once the point is reset, the LED is extinguished.
- Zone Shunt (optional)**
 Enables the user to shunt (or bypass) any selected zone. The bi-color zone LED illuminates green when shunted. All un-shunted zones operate normally.
- Zone Relay (optional)**
 Provides a dry relay contact per zone. This N/O contact follows the state of the zone alarm.
- EOL Supervision (optional)**
 Line tamper activates audible sounder and separate amber "tamper" LED. Panel remains in this state until the line tamper is corrected.

DSI[®]
 DESIGNED SECURITY, INC.
 A Detex Company

Designed Security, Inc.
 302 Detex Drive
 New Braunfels, TX 78130
 800-272-3555
 512-321-4426

www.dsigo.com
 dsi@dsigo.com