


OFF-LINE SWITCHING REGULATED POWER SUPPLY
For use with DSI turnstile products

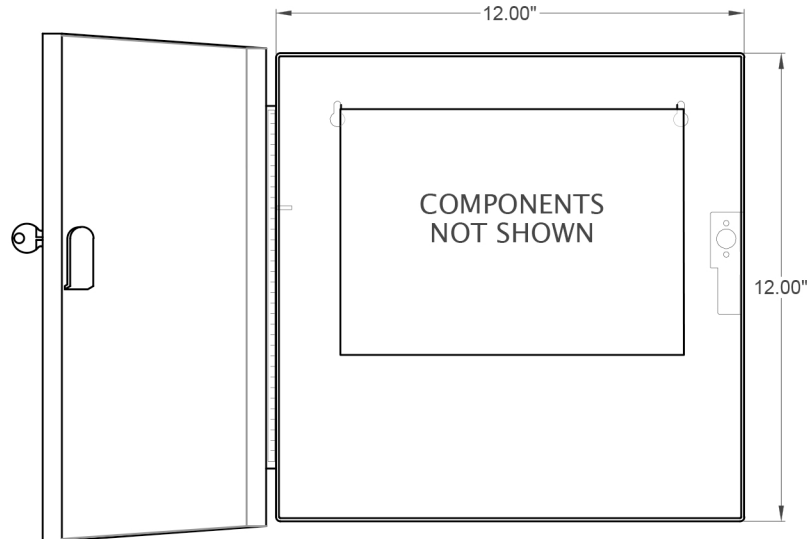

Features	<p>Fire Alarm Interface for remote power control Board fault indication and reporting Support for optional battery backup Primary AC Connector input has safe disconnect Locking cabinet</p>
Electrical Specifications	<p>Input Voltage: 120VAC or 240VAC, selectable Input current: 1.6 A Max. Output Voltage: 12 or 24 VDC, selectable Output Current: 6 A, continuous</p>
Environmental Specifications	<p>Operating Temperature: 0° C to 49° C Humidity: 93% @ 32° C</p>
Mechanical Specifications	<p>Vented cabinet - 12" L x 12" W x 4" D, 10 lbs Battery space - two 7 Ah or two 12 Ah batteries</p>
Code Compliance	<p>UL Listed NFPA 72 NFPA 731 (proposed) CSFM NY MEA FCC Part 15, subpart B, class A</p>
For use with	<p>ES831 (1 lane at 24 VDC), ES850 (6 lanes at 12 VDC) and Mechanical (3 lanes at 12 VDC - Excludes FAL) turnstiles</p>

*Designed Security,
 Inc.
 302 Detex Drive
 New Braunfels, TX
 78130
 800-272-3555
 512-321-4426*