


**OFF-LINE SWITCHING REGULATED POWER SUPPLY**  
 For use with DSI turnstile products

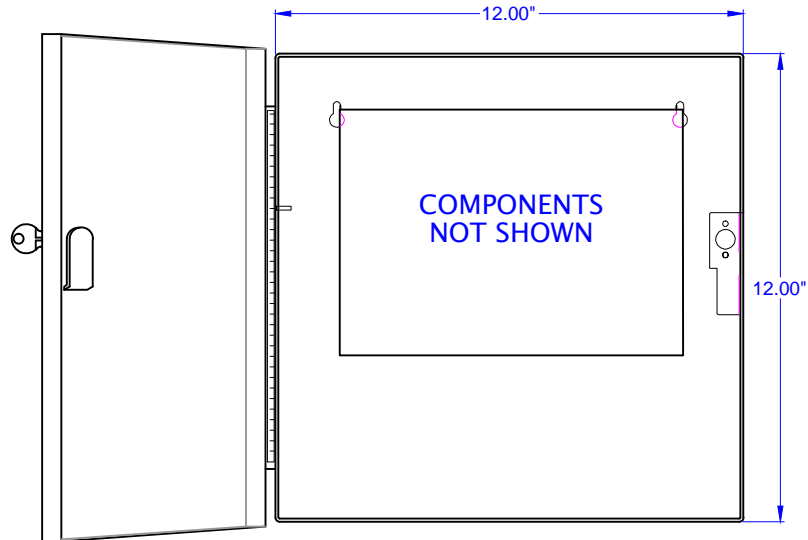

**Features**

- Fire Alarm Interface for remote power control**
- Board fault indication and reporting**
- Support for optional battery backup**
- Primary AC Connector input has safe disconnect**
- Locking cabinet**

**Electrical Specifications**

- Input Voltage: 120VAC or 240VAC, selectable**
- Input current: 1.6 A Max.**
- Output Voltage: 12 or 24 VDC, selectable**
- Output Current: 6 A, continuous**

**Environmental Specifications**

- Operating Temperature: 0° C to 49° C**
- Humidity: 93% @ 32° C**

**Mechanical Specifications**

- Vented cabinet - 12" L x 12" W x 4" D, 10 lbs**
- Battery space - two 7 Ah or two 12 Ah batteries**

**Code Compliance**

- UL Listed**
- NFPA 72**
- NFPA 731 (proposed)**
- CSFM**
- NY MEA**
- FCC Part 15, subpart B, class A**

**For use with**

- ES831 (1 lane at 24 VDC), ES850 (6 lanes at 12 VDC) and Mechanical (3 lanes at 12 VDC - Excludes FAL) turnstiles**

**800 272 3555**  
**FAX 512 321 9181**

**DESIGNED SECURITY, INC.**  
 1402 HAWTHORNE STREET  
 BASTROP, TX 78602 (512) 321-4426

**www.dsigo.com**  
 Email: [dsi@dsigo.com](mailto:dsi@dsigo.com)