


Designed Security, Inc.
ES440-B2-C9 Application Note

Pneumatic Time Delay Pushbutton Control
 is used to release door with mag lock

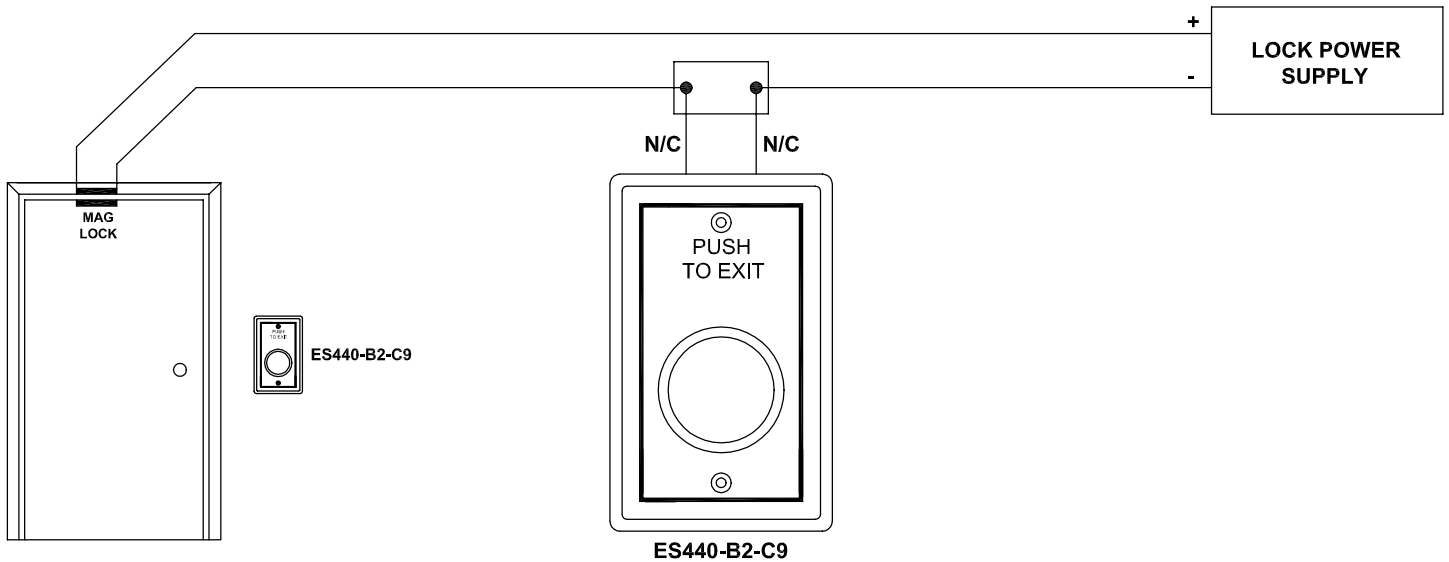

ES440-B2-C9 Pneumatic Time Delay Pushbutton Control is used to release and/or shunt locking devices where line power is unavailable to the pushbutton. The delay time is field adjustable from 2-60 seconds.

Specifications:

Model: ES440-B2-C9
Contacts: 1 N/O
 1 N/C
Mounting: 1 gang trim plate
 2.5" electrical box
Button: Medium mushroom

Current rating: 10 amps @ 125-250 VAC
Time range: 2 to 60 seconds, ±15%