

The ES300 series Battery Powered Door Prop Alarm is designed for applications where doors may be used for egress or ingress, but may not be held or propped open. Door open times from 1 second to 4 minutes (15 second default) are field selectable. The smaller size makes installation quick and easy.







FEATURES & BENEFITS


- Easy to install
- Alarm silences automatically when door is closed, no need for reset
- Reliable
- Economical
- Tamper resistant
- Field selectable timing options
- Weatherized unit available (add "W" to part number when ordering)
- UL Listed
- Mortise cylinder pre-installed. (MC65) Contact factory to order the ES300 without cylinder
- Made in the U.S.A.



Designed Security, Inc. 302 Detex Drive New Braunfels, TX 78130 800-272-3555 512-321-4426

www.dsigo.com dsi@dsigo.com

ES300 Series Battery Powered Door Prop - Typical Application

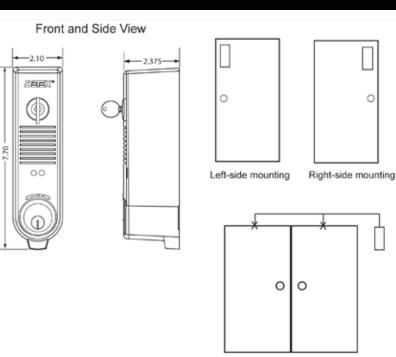

Door switch actuated

ELECTRICAL SPECIFICATIONS

Power:	9VDC battery operated, with low battery alert
Local control:	Key switch for reset/bypass
Control input:	Intelligent circuit senses the external magnet location Automatically and sets the correct door hand
Delay time:	1 second, 15 seconds, 30 seconds, 45 seconds, 1 minute, 2 minutes and 4 minutes
Sound level:	100 dB

MECHANICAL SPECIFICATIONS

ES300: Mounting: ES300 xMC65: ES300W: ES300W xMC65:

Gate, wall, or door mounted Gate, wall, or door mounted Gate or door mounted weatherized Gate or door mounted weatherized

Dimensions: ES300

Key switch: ES300: ES300W: ES300 xMC65: ES300W xMC65: 2.10" w x 7.70" h x 2.375" d

Mortise hardware without cylinder Mortise hardware without cylinder Mortise hardware with cylinder Mortise hardware with cylinder

Finish: Grey

Note: Weatherized models do not have an external door switch input.

PRODUCT DESCRIPTION

0

The ES300 is a low-cost solution that is ideal for low risk emergency exit only doors, such as doors leading to stockroom from sales floor, stairwell doors, and various internal doors at healthcare and educational facilities. Featuring field selectable door open times from 1 second to 4 minutes, the ES300 helps prevent secure doors from being propped open to avoid a security breach in the access control system.



Designed Security, Inc. 302 Detex Drive New Braunfels, TX 78130 800-272-3555 512-321-4426

www.dsigo.com dsi@dsigo.com