

ES634

12 ZONE ANNUNCIATOR WITH SUPERVISION




1-800-272-3555

Note:
For four zones use an **ES614**
For eight zones use an **ES624**

Note:
Wire Gauge: Signal
22 AWG = Signal wires up to 85 feet
18 AWG = Signal wires up to 180 feet
16 AWG = Signal wires up to 300 feet
Wire Gauge: Power
22 AWG = Power wires up to 85 feet
18 AWG = Power wires up to 180 feet

Specifications:
Power: 12VDC at (500ma)
Input: N/C door contact
Output: N/O global alarm relay 500ma at 30 VDC
Output: N/C global alarm relay 500ma at 30 VDC
Output: N/C tamper alarm relay 500ma at 30 VDC
Horn Volume: 70 db
Back box: 4 Gang 2.5" deep

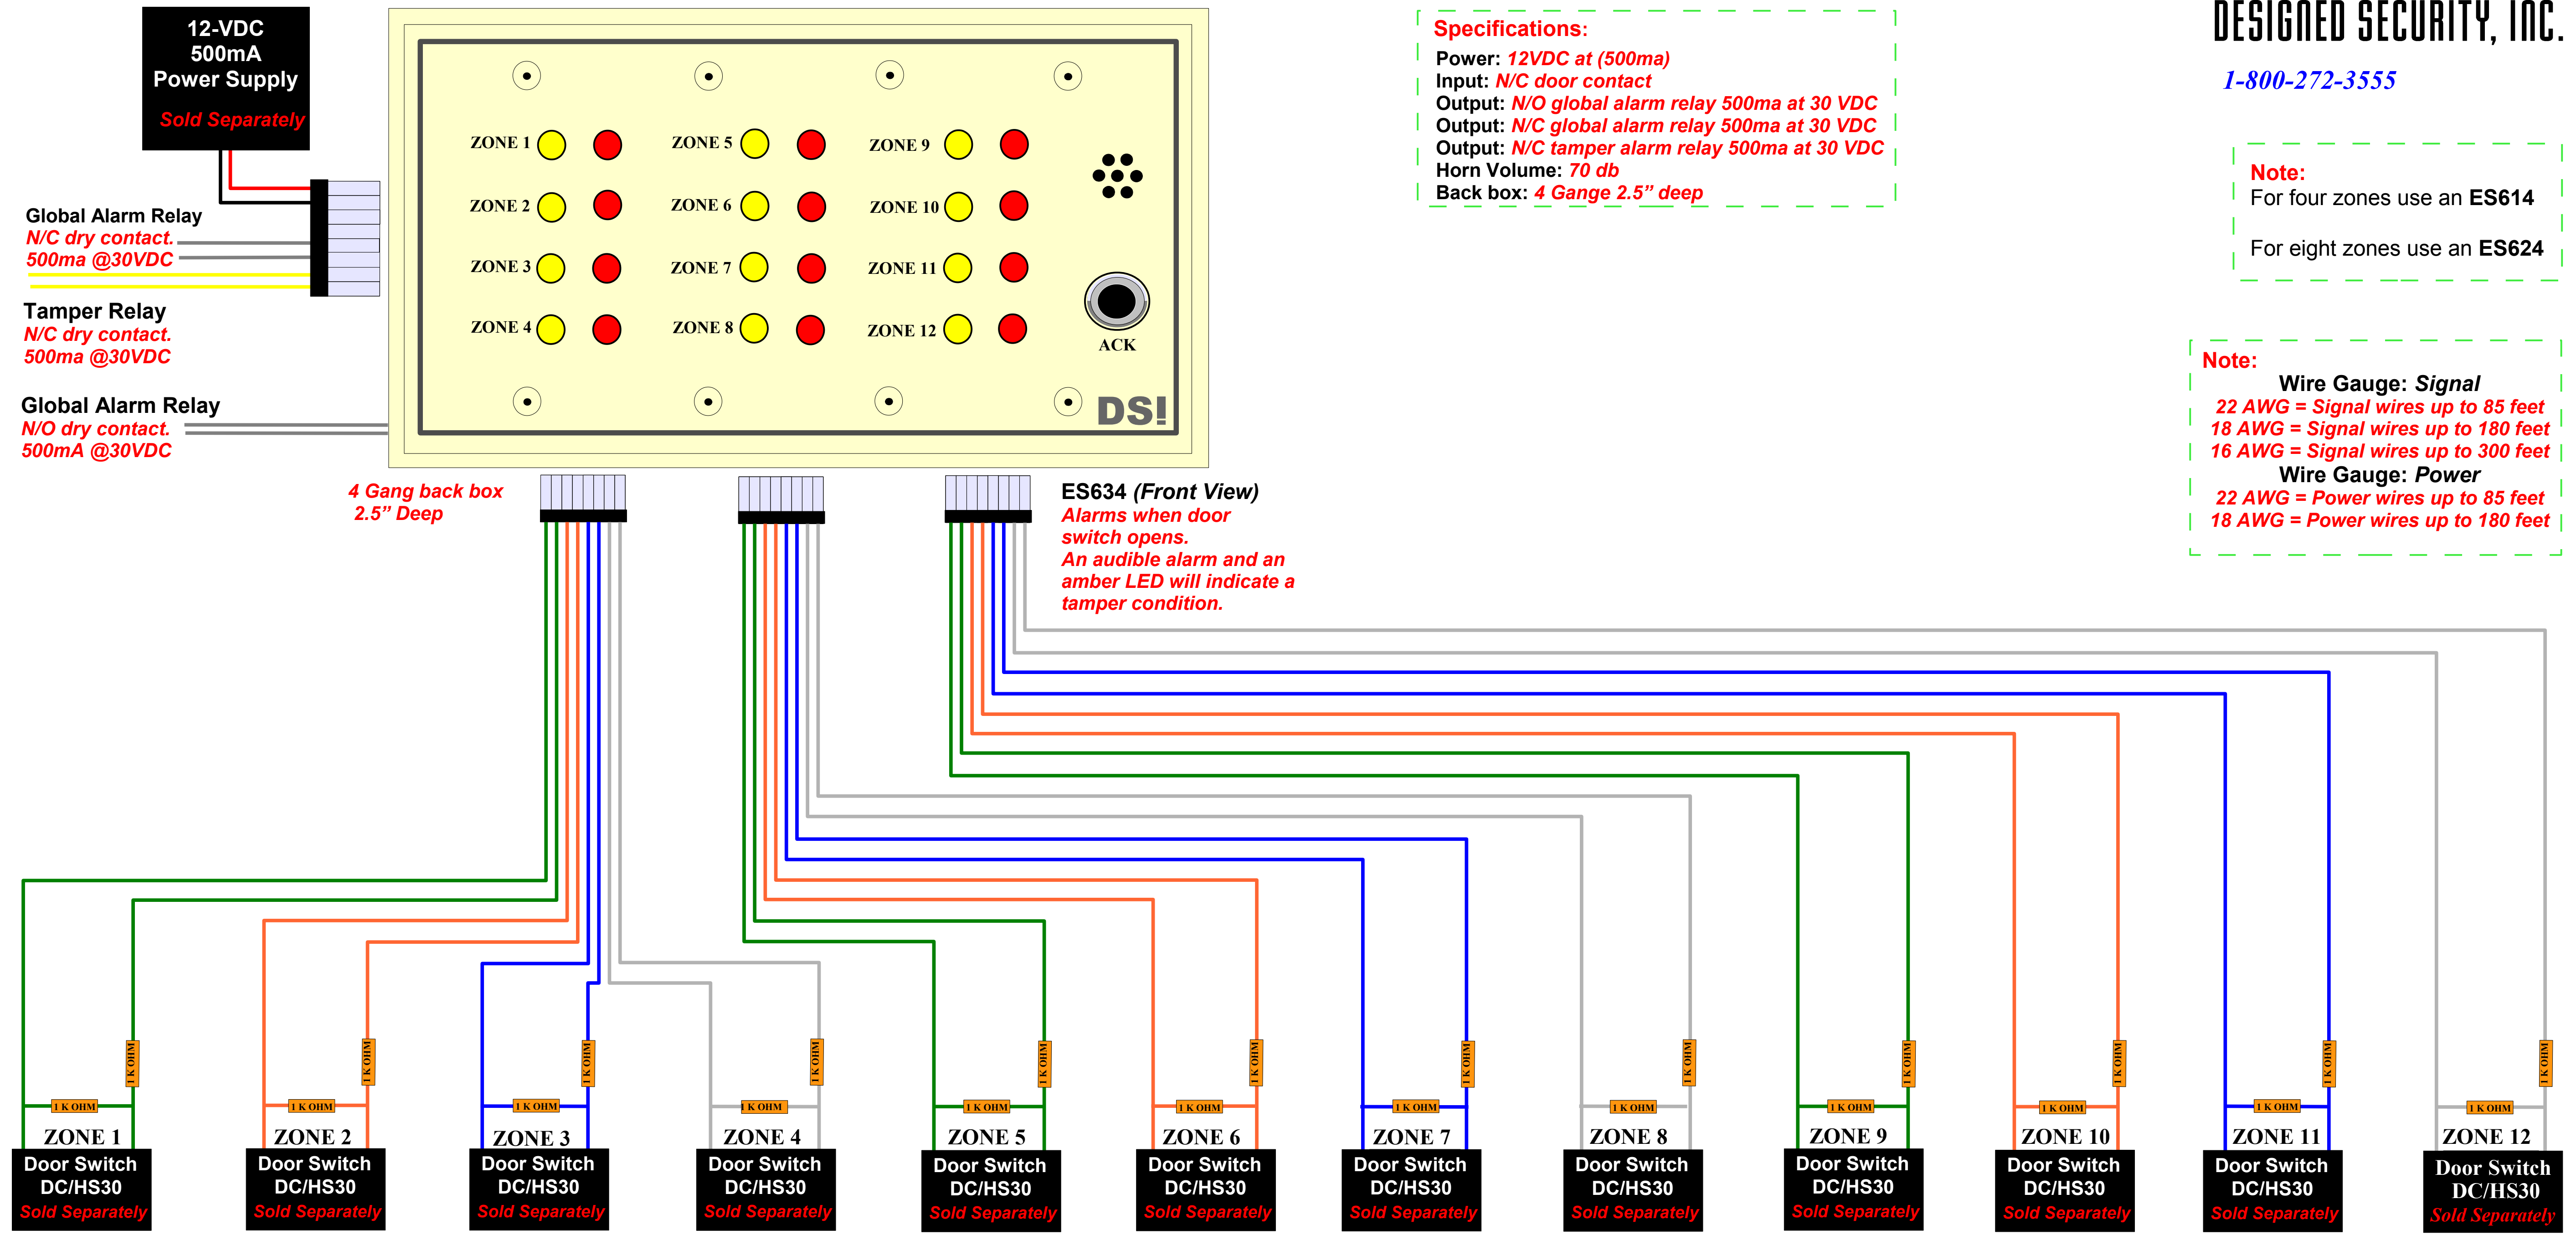

4 Gang back box
2.5" Deep

ES634 (Front View)
Alarms when door
switch opens.
An audible alarm and an
amber LED will indicate a
tamper condition.

ZONE 1 Door Switch DC/HS30 Sold Separately
ZONE 2 Door Switch DC/HS30 Sold Separately
ZONE 3 Door Switch DC/HS30 Sold Separately
ZONE 4 Door Switch DC/HS30 Sold Separately
ZONE 5 Door Switch DC/HS30 Sold Separately
ZONE 6 Door Switch DC/HS30 Sold Separately
ZONE 7 Door Switch DC/HS30 Sold Separately
ZONE 8 Door Switch DC/HS30 Sold Separately
ZONE 9 Door Switch DC/HS30 Sold Separately
ZONE 10 Door Switch DC/HS30 Sold Separately
ZONE 11 Door Switch DC/HS30 Sold Separately
ZONE 12 Door Switch DC/HS30 Sold Separately